

Institute of Electrophysics, Ural Branch of RAS
Institute of High Current Electronics, Siberian Branch of RAS
Institute of Metal Physics, Ural Branch of RAS
Institute of Metallurgy, Ural Branch of RAS
Ural Branch of the Russian Academy of Sciences
Ural Federal University
LLC "Signifika"

15th International Conference
“Gas Discharge Plasmas
and Their Applications”
GDP 2021

Abstracts

September 5–10, 2021
Ekaterinburg, Russia

Ekaterinburg 2021

UDC 533.9
BBC 22.333.3

15th International Conference "Gas Discharge Plasmas and Their Applications" GDP 2021 (Ekaterinburg, September 5–10, 2021): Abstracts. – Ekaterinburg: IEP UB RAS, 2021. – 260 p.

Edited by Dr Nikolay Zubarev.

ISBN 978-5-6046849-0-0

The book contains abstracts of oral and poster reports presented at the 15th International Conference "Gas Discharge Plasmas and Their Applications" (GDP 2021). This event is a continuation of conferences on gas discharge physics held in Russia since 1984, as well as seminars and conferences on the technological application of low-temperature plasma. The conference is held every 2 years in different cities of the Russian Federation. This year, the wonderful city of Ekaterinburg, located in the heart of the Urals on the border of Europe and Asia, was chosen as the venue. The program of the Conference covers a wide range of technical areas and modern aspects of the physical processes occurring in generators of low temperature plasma, low and high-pressure discharges, pulsed plasma sources, surface modification, and other gas-discharge technologies.

Science Edition

Published in author's version

ISBN 978-5-6046849-0-0

© IEP UB RAS

COMBINED ELECTRIC DISCHARGE "ARC + DISCHARGE WITH LIQUID ELECTROLYTE CATHODE"

G.K. TAZMEEV¹, B.A. TIMERKAEV², K.K. TAZMEEV¹

¹Kazan Federal University, Naberezhnye Chelny Institute, Naberezhnye Chelny, Russia

²Kazan National Research Technical University named after A.N. Tupolev, Kazan, Russia

e-mail: gktazmeev@kpfu.ru

One of the features of discharge with liquid electrolyte cathode is volumetric combustion. By changing geometry of cathode zone on electrolyte surface, it is possible to give plasma column various shapes, in particular, it is possible to form a "flat wall" [1, 2]. In this work, a device that allows to create plasma column in form of a "hollow cylinder" has been developed. It contains one anode 1 and two cathodes: metal 2 and electrolyte 3 (Fig. 1). An aqueous solution of sodium chloride is used as an electrolyte cathode. It flows out of the annular channel 4 with dielectric walls. A negative potential is fed to the graphite ring 5, mounted inside the channel. The discharge between the electrolyte cathode 2 and the metal anode 1 is volumetric and forms a "hollow cylinder". The arc burns between metal electrodes 1 and 2 inside the "hollow cylinder". Electrical power is supplied from a single source. The currents flowing in the device are regulated by two ballast resistors 6 and 7.

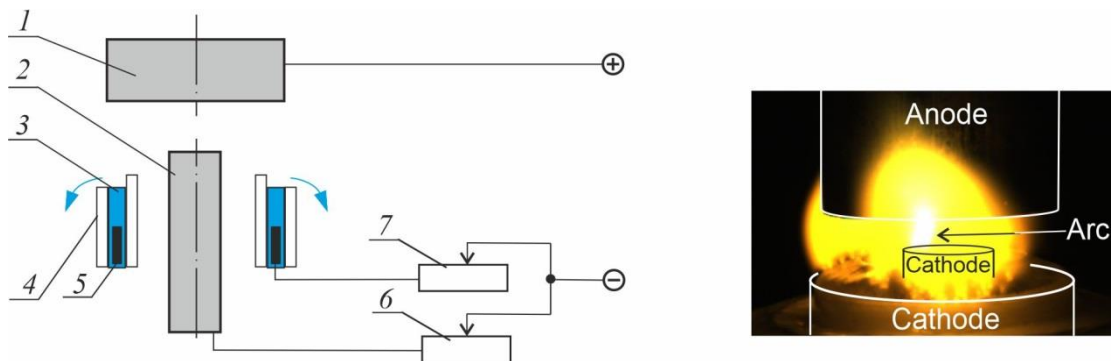


Fig. 1. Diagram of the experimental setup and snapshot of the discharges.

The gas discharge current with liquid electrolyte cathode was set in the range of 5-10 A, and arc current varied in range of 1-10 A. Metallic cathodes made of copper and duralumin were used. At elevated currents, the duralumin cathode was underwent to intense destruction. This result is quite expected, since arc burns in an oxidising environment.

Oscillograms of currents and voltages were obtained. Stable current regimes with small-scale pulsations have been recorded. Spectral studies in visible range have been carried out. A characteristic feature of the spectra was presence of the Balmer lines H_{α} and H_{β} .

REFERENCES

- [1] G.K. Tazmeev, B.A. Timerkaev and K.K. Tazmeev, "Study of the binding zone of electrical discharge to the liquid cathode by high-speed visualization," *Journal of Physics: Conference Series*, vol. 789, p. 012059, 2017.
- [2] R.N. Tazmeeva and B.K. Tazmeev, "Development features of the plasma flow in the gas discharge with the liquid electrolyte cathode", *Journal of Physics: Conference Series*, vol. 1328, p. 012074, 2019.