



INTENSIFICATION OF OIL PRODUCTION BY HYDRAULIC FRACTURING METHOD FROM TERRIGENOUS RESERVOIRS IN DEPLETING OIL FIELD

Journal:	<i>Petroleum Science and Technology</i>
Manuscript ID	Draft
Manuscript Type:	Original Papers
Date Submitted by the Author:	n/a
Complete List of Authors:	Vakhin, Alexey; Kazanskij Privolzskij Federal'nyj Universitet, Gubaydullin, Farid; Kazanskij Privolzskij Federal'nyj Universitet, , Institute of Geology and Petroleum Technologies Galimov, I.; PJSC «TATNEFT»
Keywords:	hydraulic fracturing, oil debit, reservoir pressure, water cut, permeability

SCHOLARONE™
Manuscripts

1
2
3
4 **INTENSIFICATION OF OIL PRODUCTION BY HYDRAULIC FRACTURING**
5 **METHOD FROM TERRIGENOUS RESERVOIRS IN DEPLETING OIL FIELD**

6 I.F. Galimov^a, F.A. Gubaydullin^b, A.V. Vakhin^b
7

8 ^a *Kazan (Volga) Federal University, 18 Kremlyovskaya St., Kazan, Russia,*
9

10 ^b *PJSC «TATNEFT»*
11

12 Correspondence should be addressed to Alexey V. Vakhin¹; vahin-a_v@mail.ru
13
14

15
16
17 **Key words:** hydraulic fracturing, oil debit, reservoir pressure, water cut, permeability.
18
19

20
21 **Abstract.** The given article presents the results of industrially applied approach-
22 es for intensification of oil production from terrigenous reservoirs at late field develop-
23 ment stages. In such condition the oil production is influenced by continuous reserves
24 deterioration. The share of oil resources from low productive reservoirs is increasing.
25 Intensification of oil production with hydraulic fracturing approach is carried in South
26 Romashkinskoe Area of Romashkinskoe Field.
27
28
29
30
31
32
33

34 The oil extraction in the given area is 86.1% from recoverable initial oil reserves
35 (IOR). The oil recovery factor is 0.458, however according to project the given coeffi-
36 cient was 0.475. The development is characterized by small decrease in oil production
37 rate (less than 2% from IOR), considerable water-cut of well products and a total transi-
38 tion to mechanical exploitation mean.
39
40
41
42
43
44

45 As a result of hydraulic fracturing the oil rate has increased twice. Thus, accord-
46 ing to the results of industrially applied approaches one can evaluate about high effi-
47 ciency of the given method in depleting reservoir condition, low production rate and
48 high water-cut of well products.
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4 Although hydraulic fracturing is a mature technology that has been used com-
5 mercially since the late 1940s, the development of unconventional hydrocarbon fields
6 with the combination of directional drilling and multistage hydraulic fracturing in the
7 last two decades gave rise to a substantial progress in both operations and associated
8 modeling (Osiptsov 2017). Both the traditional viscous fluids used in conventional hy-
9 draulic fracturing operations as well as the new family of fluids being developed for
10 both traditional and unconventional reservoirs (Barati and Liang 2014).
11
12
13
14
15
16
17
18

19 The South-Romashkinskoe area of Romashkinskoe oil field is in the final stage
20 of exploration. The oil extraction makes 86.1% of initial recoverable resources. Oil
21 recovery factor is 0.458, however according to project 0.475. One of the features of late
22 stage exploration is its continuous deterioration of reserves. The share of low productive
23 reservoir is increasing. In the next several years as a result of significant oil recovery
24 and increasing water-cut production the natural decrease of yearly oil extraction rate has
25 begun. After that, all geological and technical events that were done in field were
26 directed to create the intensified exploration system, which allows to increase the oil
27 production rate. The field started the final – fourth stage of exploration. It is described
28 by slow decrease in oil production (the extraction rate is less than 2% from initial oil
29 reserves), significant water-cut production and the whole switch to mechanical mean of
30 exploitation. The dynamics of oil, fluid and water-cut production are provided by
31 Figure 1.
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46

47 From the given data it is obvious that in the beginning period the area has been
48 explored at very low water-cut production rate. It is explained by shutting off the
49 watered wells at comparatively low values (50-60%). At the end of first exploration
50 stage, when the extracted amount of initial oil reserve was 22.7%, the water-cut
51
52
53
54
55
56
57
58
59
60

1
2
3
4 production was 4.2% and WOR-0.018. The water encroachment rapidly increases after
5
6 50% of initial oil reserve extraction. This is explained by depletion and water
7
8 encroachment of more productive formations and connection of upper formations which
9
10 are characterized by high heterogeneity and hard-to-recover reserves.

11
12 The fluid production is intensively increased due to water and oil production
13
14 rates, reaching its peak in 1977 with a volume of 11.340 million ton. During 14 years,
15
16 with decreasing oil production rate, the fluid drainage was almost constant (10-11
17
18 million ton) till 1986. Starting in 1987 fluid drainage decreased as a result of focusing
19
20 process to limit the fluid production by disabling water encroached formations from
21
22 exploitation, application of cyclic steam stimulation, unbundling development objects
23
24 and other methods of regulations. To maintain the reservoir pressure in the area water
25
26 was injected in 1955 and every year the water injection volume had been increasing.
27
28 However, the injection volume was increased till 1970. Initially, in 1971 the total water
29
30 injection was compensating accumulated fluid drainage (Figure 1). Thus, the proportion
31
32 of fluid injection to production in reservoir conditions reached one. The provided data
33
34 shows that yearly injection was totally compensating fluid drainage. The amount of
35
36 water injection was decreasing since 1987, thus decreasing fluid drainage. The complex
37
38 operations to improve the water flooding system and regulating exploitation process
39
40 allowed to decrease the water injection volume. According to the injected volume of
41
42 water the pressure of reservoir reached its average. At the end of a year the reservoir
43
44 pressure was 16 MPa, in the extraction zone – 16.9 MPa. Since 1975 the reservoir
45
46 pressure was constant with a small fluctuation.
47
48
49
50

51 The recoverability of reserves in the horizon D1 is analyzed through formations,
52
53 rock groups, blocks and whole area.
54
55
56
57
58
59
60

1
2
3
4 The highest production rates through the reservoir were from “g1” and “g2”,
5
6 which extraction from initial reserves was 94.3% and 96.2%, accordingly. The present
7
8 oil recovery factor is 0.508 and 0.574 respectively. The least produced formation is
9
10 “D1-a”, with the present recovery factor of only 0.284, while extraction from initial
11
12 reserves is 61.1%. For other formations of horizon the recoverable reserves are
13
14 extracted from 65.9% (D1-b1) to 82.9% (D1-b3). The current oil recovery factor varies
15
16 between 0.299 and 0.423.
17

18
19 Exploitation of oil reserves according to rock groups is also unequal. The most
20
21 developed reserves belong to high productive non-clay reservoir rocks. The extraction
22
23 amount is 93.2% from initial reserves. With a big lag the development of high
24
25 productive clay rocks is run (the extraction from initial oil reserves is 63.4%).
26

27
28 Low productive reservoirs are developed in a special case - when they have a
29
30 contact with sandstone zone. The extraction from this zones is only 23.5% from initial
31
32 recoverable reserves. This kind of exploitation relation of reserves according to rock
33
34 groups is the same through all reservoir and area.
35

36
37 The accumulate oil production from horizon D1 of South-Romashkinskoe area is
38
39 135983.8 thousand ton (86.1% from initial recoverable reserves). The oil recovery
40
41 factor equals to 0.458.
42

43
44 In the period of 2000-2016 the oil production per year was around 320 thousand
45
46 ton. The extraction rate from initial recoverable reserves per year is 0.2%, from the
47
48 current reserves 1.32%. Today 60% of production wells work with a production rate of
49
50 0.5 to 2 ton oil per day, 6% - more than 8 ton/day. The water encroachment exceeds 2%
51
52 for 12.5% of production wells and more than 90% for 14.4% of wells. During the
53
54
55
56
57
58
59
60

1
2
3
4 development period 330.760 million ton of fluid is extracted and water oil ratio is equal
5
6 to 1.43.
7

8 In order to increase the oil recovery factor of the given object a various
9
10 approaches are applied for intensification of oil production.
11

12 Today in Romashkinskoe oil field, to increase the permeability of bottom-hole
13
14 zones more than 36 methods are applied (Gubaidullin et al. 2017; Baibekova et al.
15
16 2015; Mukhamatdinov et al. 2016). The most common method of Bottom-Hole Zone
17
18 Treatment (BHZT) in the given area is a hydraulic fracturing. It is a combined
19
20 technology to treat the Bottom-hole zones with further application of acid compositions
21
22 with active surface; treating wellbore zones with multifunctional reagents; acoustic-
23
24 chemical influence; removing clays from bottom-hole zones (with SNPKH 9350);
25
26 depressed perforations; application of SNPKH 9010 compositions, thermogas chemical
27
28 influence on reservoir (Vakhin et al. 2015; Varfolomeev et al. 2016; Vakhin et al.
29
30 2017).
31
32
33

34 The BHZT is carried out in all the steps of oil reservoir exploitation to restore
35
36 and increase rock properties (porosity, permeability and etc.) of bottom hole zones.
37
38 Thereby the goal of the operation is to increase the efficiency of both production and
39
40 injection wells.
41

42 Among all mentioned methods, hydraulic fracturing gives a maximum techno-
43
44 logical effect to improve bottomhole zone parameters such as porosity, permeability,
45
46 hydrodynamic connection between wellbore and reservoir and also covering additional
47
48 hydrocarbon reserves in case of less permeable rocks. "Stimulated reservoir volume"
49
50 (SRV) makes it possible for commercial production of shale gas by means of multistage
51
52 fracturing of horizontal wells (Guo et al. 2014). Laboratory tests using a process simula-
53
54
55
56
57
58
59
60

1
2
3
4 tion device were performed to confirm the characteristics of fracture initiation and prop-
5
6 agation in different reservoirs (Yan, Li, and Bi 2011). Hydraulic fracture propagation
7
8 behavior and geometry through perforated vertical wellbores are studied by a series of
9
10 servo-controlled tri-axial large-scale fracturing experiments. The experimental results
11
12 show that the tortuous fracture can be generated by using oriented perforation fracturing
13
14 technology (Chen et al. 2010).

15
16
17 In many cases, especially in late stages of reservoir exploitation, application
18
19 of hydraulic fracturing allows to solve problems regarding restoration of hydrodynamic
20
21 connections between productive reservoir rocks - production wellbores and thus
22
23 providing to more production of oil reserves. In order to define-determine the efficiency
24
25 of applying hydraulic fracturing technology in the upper mentioned area two wells are
26
27 selected: #1777 (in the formation D1-a) and #9405A (in the formation D1-b). The
28
29 technological results of treated wells are presented in Table 2.

30
31
32 According to the results of industrial experiment provided by figures 2, 3 and
33
34 Table 2 one can conclude:

35
36 The directed fractures in productive formations of given horizon increase the oil
37
38 recovery more than 30%; Within oil production rise the water encroachment is also
39
40 increasing by more than 35%; According to upper mentioned conclusions hydraulic
41
42 fracturing method needs to be combined with isolation of water encroaching sources in
43
44 empty areas of carbonate reservoirs; Estimation of the effectiveness of hydraulic
45
46 fracturing was calculated by the methods (Kanevskaya, Diyashev and Nekipelov 2002).
47
48 The calculation results are presented in Table 3.

49 50 51 **Conclusion**

1
2
3
4 This work investigated the application term of hydraulic fracturing method, the
5 well selection criteria, the calculation of hydraulic fracturing process, as well as
6 technological efficiency.
7
8

9
10 For the well # 1777 the average oil production debit before hydraulic fracturing
11 was 2 ton/day and the average water encroachment was 31.2%. After hydraulic
12 fracturing the debit of oil was 4.19 ton/day. For the well #9405a the average oil
13 production rate before hydraulic fracturing was 3.3 ton/day with an average water
14 encroachment of 18%. After hydraulic fracturing the oil debit was already 7.6 ton/day.
15
16
17
18
19

20
21 As a result of hydraulic fracturing the oil production rate doubles, for well #1777
22 598 ton and for well #9405a 1059 ton additional oil production is gained.
23
24

25 Thus, according to applied hydraulic fracturing results we can evaluate the
26 combination of given method with water inflow isolation technology (ASM) as a high
27 efficiency approach in case of significant reserve recovery, low oil debit and high water-
28 cut production.
29
30
31
32

33 34 **Conflict of Interests**

35
36 The authors declare that there is no conflict of interests regarding the publication of this
37 paper.
38
39

40 41 **Acknowledgments**

42 The work is performed according to the Russian Government Program of Competitive
43 Growth of Kazan Federal University.
44
45

46 47 **References**

48
49 Baibekova, L.R., Petrov, S.M., Mukhamatdinov, I.I., Burnina, M.A. 2015. Polymer
50 Additive Influence on Composition and Properties of Bitumen Polymer Compound. In-
51 ternational Journal of Applied Chemistry 11(5):593-599.
52
53
54
55
56
57
58
59

1
2
3
4 Barati, R., Liang, J.T. 2014. A review of fracturing fluid systems used for hydraulic
5 fracturing of oil and gas wells. *Journal of Applied Polymer Science* 131(16): 40735.

6
7 Chen, M., Jiang, H., Zhang, G.Q., Jin, Y. 2010. The experimental investigation of
8 fracture propagation behavior and fracture geometry in hydraulic fracturing through ori-
9 ented perforations. *Petroleum Science and Technology* 28(13): 1297-306.

10
11 Gubaidullin, A.A., Gubaidullin, F.A., Iktisanov, V.A., Musabirova, N.H. 2017.
12 Changes in parameters of deposits No. 301, 302, 303 of Romashkinskoye oil field in
13 modeling reservoir conditions. *Neftyanoe Khozyaystvo - Oil Industry* 5: 18-20.

14
15 Guo, T., Zhang, S., Qu, Z., Zhou, T., Xiao, Y., Gao, J. 2014. Experimental study of
16 hydraulic fracturing for shale by stimulated reservoir volume. *Fuel* 128:373-80.

17
18 Kanevskaya, R.D., Diyashev, I.R., Nekipelov, Yu.K. 2002. Application of hydraulic
19 fracturing for oil production stimulation and oil recovery increase. *Neftyanoe kho-
20 zyaystvo - Oil Industry* 5: 96-100.

21
22 Mukhamatdinov, I.I., Aliev, F.A., Sitnov, S.A., Vahin, A.V., Solodov, V.A. 2016.
23 Study of rheological behavior of systems 'polymer solution - Rocks'. *Neftyanoe Kho-
24 zyaystvo - Oil Industry* 11: 121-3.

25
26 Osipitsov, A.A. 2017. Fluid Mechanics of Hydraulic Fracturing: a Review. *Journal of
27 Petroleum Science and Engineering* 156: 513-535.

28
29 Vakhin, A.V., Morozov, V.P., Sitnov, S.A., Eskin, A.A., Petrovnina, M.S.,
30 Nurgaliev, D.K., Kayukova, G.P., Romanov, G.V., Yusupova, T.N. 2015. Application
31 of Thermal Investigation Methods in Developing Heavy-Oil Production Technologies
32 *Chemistry and Technology of Fuels and Oils* 50(6): 569-78.

33
34 Vakhin, A.V., Sitnov, S.A., Mukhamatdinov, I.I., Onishchenko, Y.V., Feoktistov
35 D.A. 2017. Aquathermolysis of High-Viscosity Oil in the Presence of an Oil-Soluble
36 Iron-Based Catalyst. *Chemistry and Technology of Fuels and Oils* 53 (5): 666-74.

37
38 Varfolomeev, M.A., Nagrimanov, R.N., Samatov, A.A., Rakipov, I.T., Nikanshin,
39 A.D., Vakhin, A.V., Nurgaliev, D.K., Kok, M.V. 2016. Chemical evaluation and kinet-
40 ics of Siberian, north regions of Russia and Republic of Tatarstan crude oils. *Energy
41 Sources, Part A: Recovery, Utilization and Environmental Effects* 38(8): 1031-8.

42
43 Yan, T., Li, W., Bi, X. 2011. An experimental study of fracture initiation mecha-
44 nisms during hydraulic fracturing. *Petroleum Science* 8(1): 87-92.

Table 1. Porosity and permeability properties of D1-a and D1-b1,2 reservoir rocks

Formation	Parameters	Reservoir group			
		1	(I)	2	Average value
A	Porosity	0.214	0.188	0.148	0.188
	Permeability, μm^2	0.844	0.273	0.076	0.446
	Oil saturation	0.859	0.773	0.696	0.792
B _{1,2}	Porosity	0.214	0.190	0.149	0.188
	Permeability, μm^2	0.762	0.304	0.063	0.376
	Oil saturation	0.853	0.772	0.687	0.771

Table 2. The technological results of treated wells

№ wells	Data	Oil production rate, ton/day	Water encroachment, %	Oil production rate, ton/month	Water production rate, ton/month	Accum. oil, ton
1777	01.01.2016	1.89	26.6	56.70	15.08	56.70
	01.02.2016	1.89	26.6	56.70	15.08	113.40
	01.03.2016	2.09	36.0	62.70	22.57	176.10
	01.04.2016	2.01	33.0	60.30	19.90	236.40
	01.05.2016	1.98	34.0	59.40	20.20	295.80
	01.06.2016	1.98	34.0	59.40	20.20	355.20
	01.07.2016	4.10	50.0	123.00	61.50	370.0241
	01.08.2016	4.50	51.8	135.00	69.93	412.428
	01.09.2016	4.19	51.1	125.70	64.23	443.4947
	01.10.2016	4.25	50.5	127.50	64.39	469.6158
	01.11.2016	4.15	51.3	124.50	63.87	491.5871
	01.12.2016	3.95	58.5	118.50	69.32	510.7794

9405A	01.01.2016	3.64	15.1	109.20	16.49	109.20
	01.02.2016	3.33	22.9	99.90	22.88	209.10
	01.03.2016	3.37	15.6	101.10	15.77	310.20
	01.04.2016	3.31	16.8	99.30	16.68	409.50
	01.05.2016	3.32	16.2	99.60	16.14	509.10
	01.06.2016	3.06	20.9	91.80	19.19	600.90
	01.07.2016	8.16	35.00	244.80	85.68	652.4495
	01.08.2016	8.09	38.10	242.70	92.47	730.7942
	01.09.2016	7.34	38.60	220.20	85.00	786.9909
	01.10.2016	7.34	38.42	220.20	84.60	833.719
	01.11.2016	7.34	40.30	220.20	88.74	874.261
	01.12.2016	7.34	41.20	220.20	90.72	909.8833

Table 3. The calculation results

Accumulated production without hydraulic fracturing, ton		Additional production after hydraulic fracturing, ton	
1777	9405A	1777	9405A
56.70	109.20	-	-
113.40	209.10	-	-
176.10	310.20	-	-
236.40	409.50	-	-
295.80	509.10	-	-
355.20	600.90	-	-
370.0241	652.4495	108.18	193.25
412.428	730.7942	200.77	357.61
443.4947	786.9909	295.41	521.61
469.6158	833.719	396.78	695.08
491.5871	874.261	499.31	874.74
510.7794	909.8833	598.62	1059.32

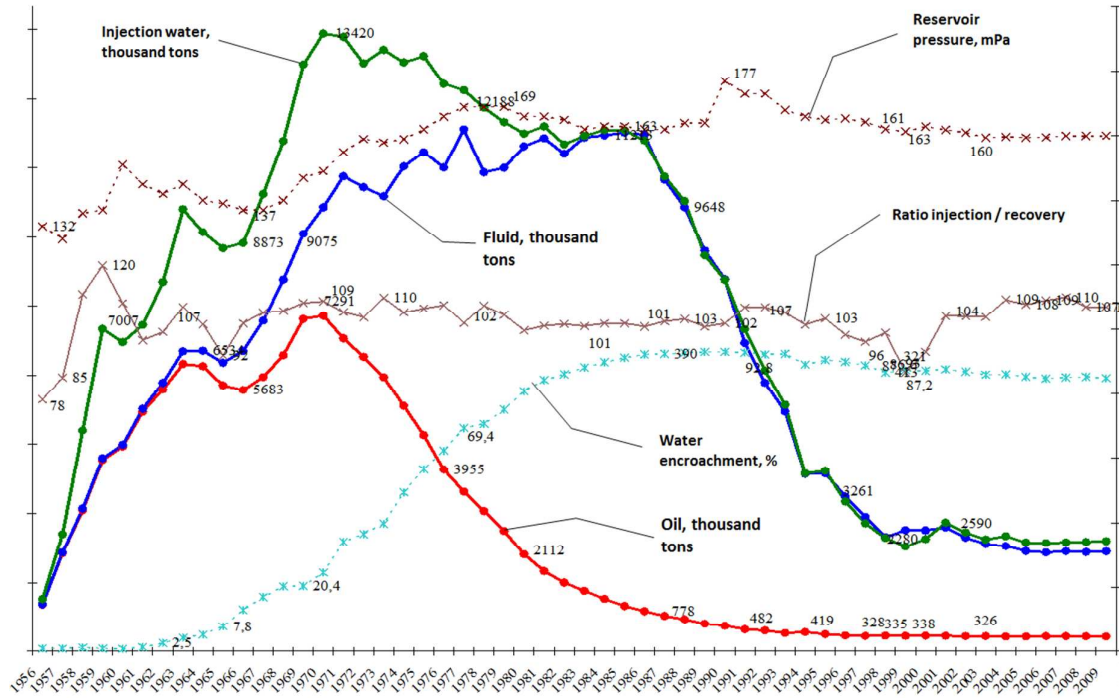


Figure 1. The dynamics of most important technological parameters in South-Romashkinskoe exploration area

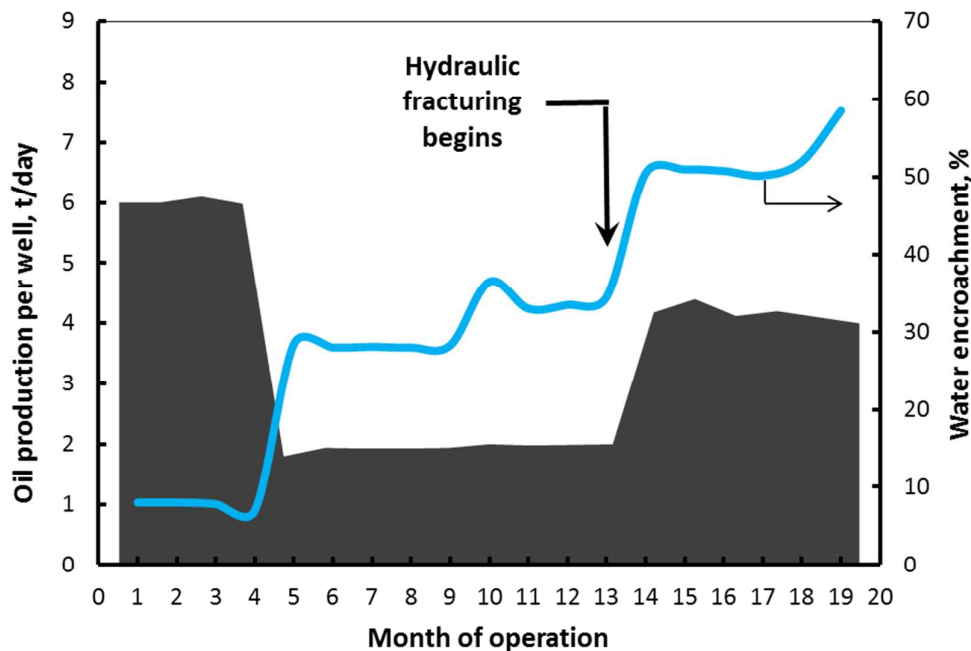


Figure 2. The flow dynamics of well #1777 before and after hydraulic fracturing technology

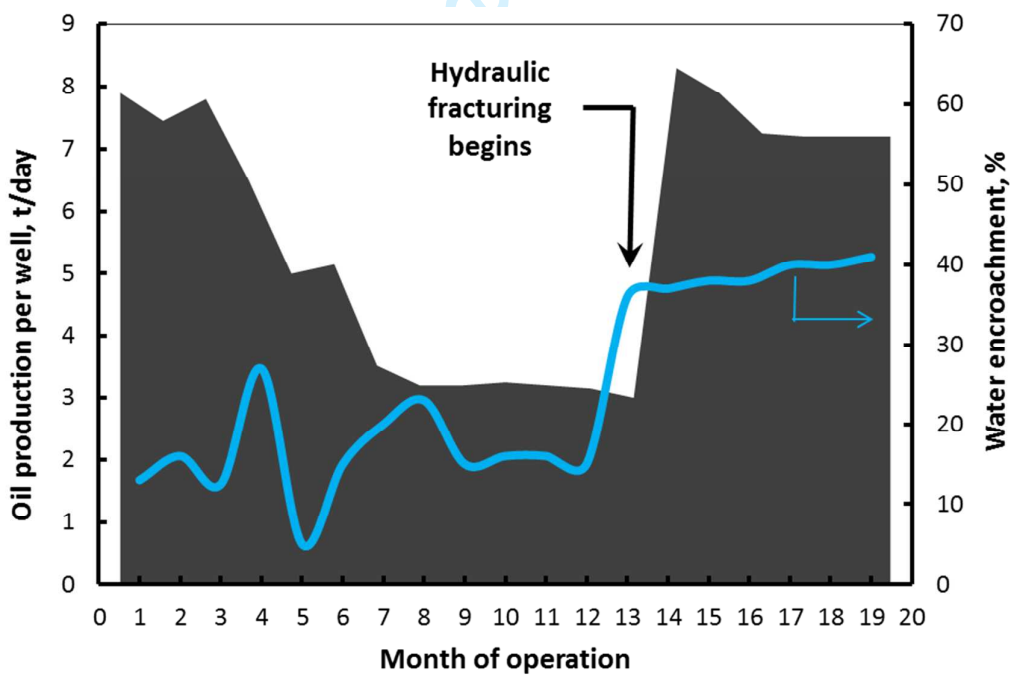


Figure 3. The flow dynamics of well #9405A before and after hydraulic fracturing technology